

(12) APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) **World Intellectual Property Organization**  
International Office



(43) **International publication date**  
23 June 2005 (23.06.2005)

**PCT**

(10) **International Publication No.**  
**WO 2005/057072 A1**

(51) **International Patent Classification<sup>7</sup>:** F16L 25/00,  
37/12, 37/133, 37/138, 33/22

(21) **International Application No.:**  
PCT/EP/2004/013353

(22) **International filing date:**  
25 November 2004 (25.11.2004)

(25) **Language of submission:** German

(26) **Language of publication:** German

(30) **Priority data:**  
103 57 892.7 11 December 2003 (11.12.2003) DE

(71) **Applicant(s)** (for all designated countries except the  
US): **A. RAYMOND & CIE** [FR/FR]; 113, cours  
Berriat, F-38028 Grenoble (FR). **VOLKSWAGEN**  
**AKTIENGESELLSCHAFT** [DE/DE]; 38436  
Wolfsburg (DE).

(72) **Inventor(s); and**

(75) **Inventor(s)/applicant(s)** (US only): **FEGER, Axel**


[DE/DE]; Juraweg 5, 79540 Lörrach (DE). **KURTH,**  
**Martin** [DE/DE]; Baders Gärten 8, 79576 Weil am  
Rhein-Ötlingen (DE). **UTZ, Daniel** [DE/DE];  
Vogesenstr. 15, 79415 Bad Bellingen (DE). **KÜBEL,**  
**Matthias** [DE/DE]; Saarbrückener Str. 176, 38116  
Braunschweig (DE).

(74) **Agent:** **RÜTTGERS, Joachim;** A. Raymond GmbH &  
Co. KG, Teichstr. 57, 79539 Lörrach (DE).

(81) **Designated countries** (unless otherwise stated, for each  
available type of national protective right): AE, AG, AL,  
AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, EG,  
ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS,  
JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,  
MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO,  
NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG,  
SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) **Title:** DEVICE FOR CONNECTION TO AN END OF A CORRUGATED PIPE

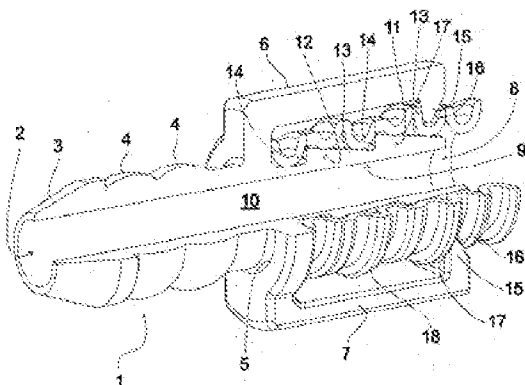

(57) **Abstract:** In a device for connection to an end of a corrugated pipe (18), an infitting section (9) can be inserted into the end of the corrugated pipe (18) and has at least one conical section (11, 12, 19) provided with a ramp surface (13) that slopes upward in an insertion direction pointing away from an infitting end (8). Further provided is a clamping arrangement (6, 7, 21, 26) spaced radially apart from the infitting section (9) and comprising at least one engaging nose (15) that can be fitted in between two elevations of the corrugated pipe (18). A sealed and operationally reliable connection to the corrugated pipe (18) is thereby created.



(84) **Designated countries** (*unless otherwise stated, for each available type of regional protective right*):  
 ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OPAI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

*For an explanation of the two-letter codes and other abbreviations, see the notes ("Guidance Notes on Codes and Abbreviations") provided at the beginning of each regular edition of the PCT Gazette.*